



Type	: High Temperature Rechargeable Nickel Cadmium Cylindrical Cell	
Nominal Dimension (with Sleeve)	: $\phi=22.5\text{mm}$ H =43.0mm	
Applications	: Permanent charging and standby application	
Nominal Voltage	: 1.2V	
Capacity	: Minimum: 1500mAh Typical: 1575mAh When discharged at 300mA to 1.0V at 20	
Charging Condition	: 150mA for 14 hrs at 20	
Service Life	: > 500 cycles (IEC61951 standard)	
Continuous Overcharge	: Comply with IEC61951 Permanent Charge Endurance Test	
Weight (approximate)	: 47g	
Internal Resistance	: Average 15m Ω upon fully charged At 1000Hz	
Charge Retention	: 70% (IEC standard)	
Ambient Temperature Range	Standard Charging	: 0 to 70
	Discharging	: - 20 to 70
	Storage	: - 20 to 35
	Storage (1 week)	: - 20 to 60

Low Rate Discharge


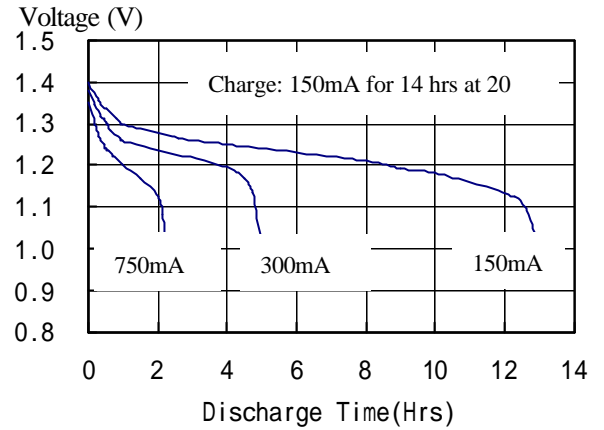


High Rate Discharge

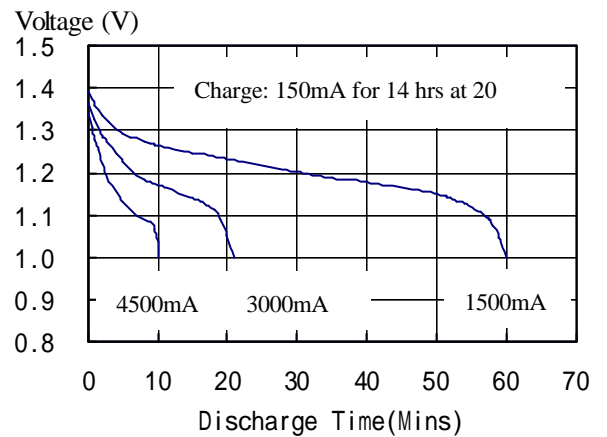

Charge/discharge efficiency vs. temp.

Available Capacity (%)

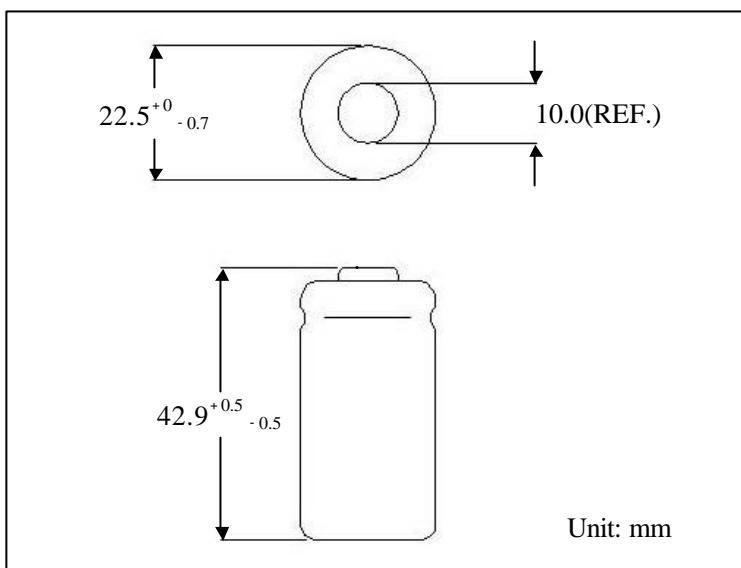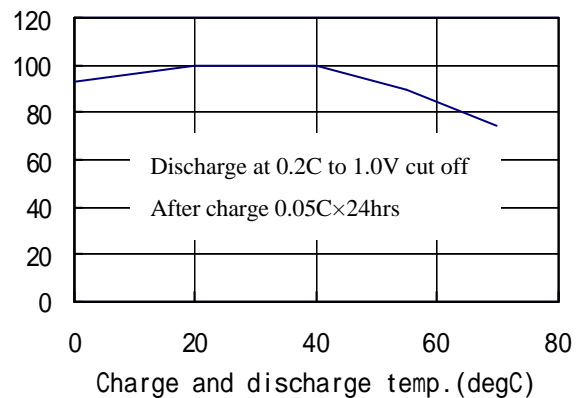

* This information given in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult C-POWER.