




Type	: Rechargeable Nickel Cadmium Cylindrical Cell
Nominal Dimension (with Sleeve)	: $\phi=32.7\text{mm}$ H =60.0mm
Discharge	: Recommended Max discharge current 12000mA
Nominal Voltage	: 1.2V
Capacity	: Minimum: 4000mAh Typical: 4200mAh When discharged at 800mA to 1.0V at 20
Standard Charge	: 400mA for 16hrs at 20
Fast Charge	: 2000mA to 4000mA (0.5C to 1C) Charge termination control recommended Control parameters: - V : 5 ~ 10mV DT/dt : 0.8 ~ 1 /min TCO : 45 ~ 50 Timer : 105% nominal input
Service Life	: > 500 cycles (IEC standard)
Continuous Overcharge	: 400mA maximum current for 28 days No conspicuous deformation and/or leakage
Weight (approximate)	: 135.0g
Internal Resistance	: 5m upon fully charged at 1000Hz
Charge Retention	: 70% (IEC standard)
Ambient Temperature Range (Recommended)	: Standard Charging : 0 to 45 Fast Charging : 10 to 35 Discharging : - 20 to 60 Storage : - 20 to 35

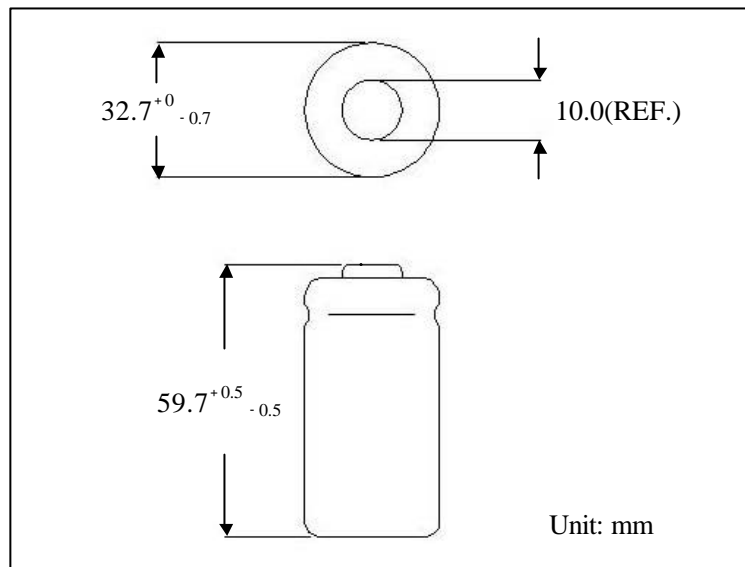


Charge

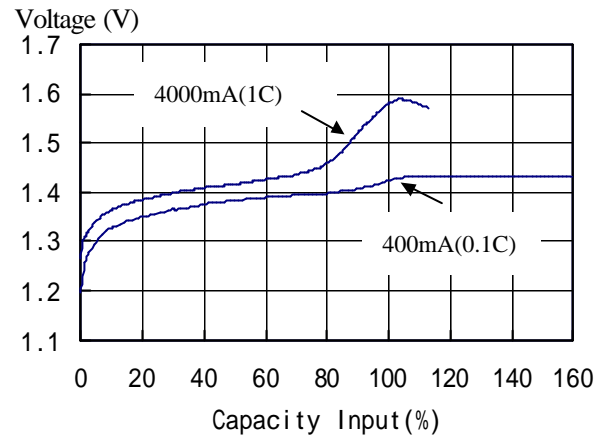

Low Rate Discharge

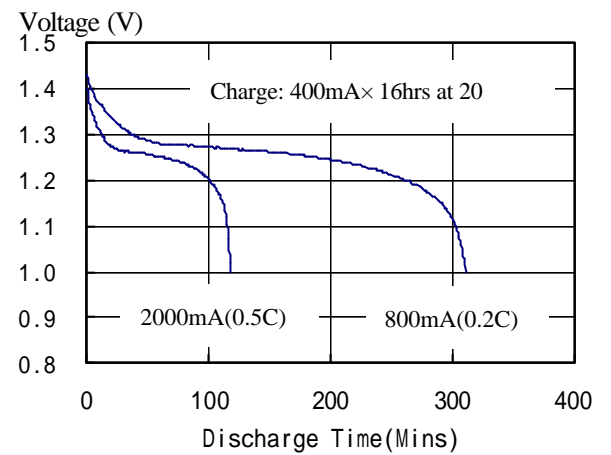

High Rate Discharge

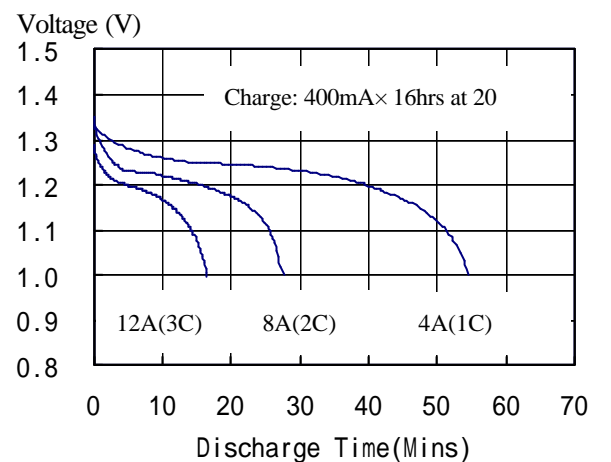

* The information contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult C-POWER.

Note: All the above values subject to change without prior notice.